

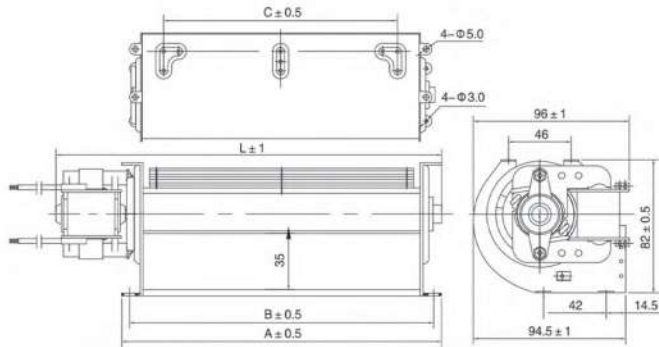


www.ftp-co.com

Cross Flow Motors



TYPE نماد	VOLTAGE ولتاژ V	FREQUENCY فرکانس Hz	CURRENT شدت جریان A	INPUT توان W	SPEED سرعت r/min	AIR VOLUME دبی هوای خروجی m³/h	A mm	B mm	C mm	L mm	NO. ON THE CURVE شماره منحنی
YGF60-480	220	50	0.42	48	2000	354	505	495	450	576	1
YGF60-420	220	50	0.40	45	2000	310	445	435	390	516	2
YGF60-360	220	50	0.38	43	2100	270	385	375	330	456	3
YGF60-300	220	50	0.27	29	2100	230	325	315	270	382	4
YGF60-240	220	50	0.25	27	2100	175	265	255	210	322	5
YGF60-183	220	50	0.2	20	2000	140	206	196	153	253	6

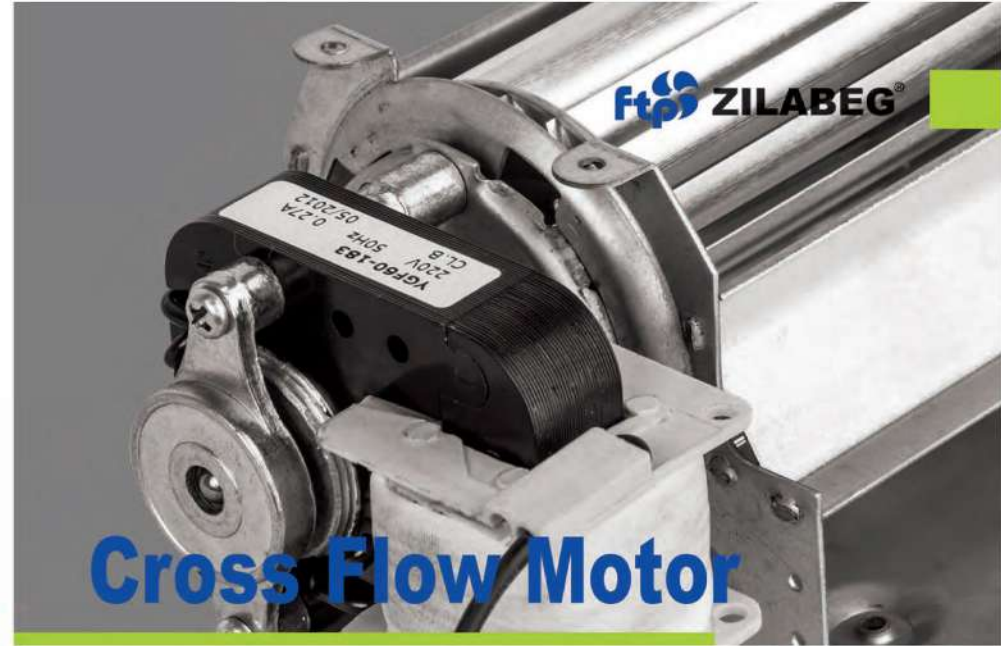

Cross Flow Motor

کدینگ محصولات

Illustration of fan motor model



نمودار اتصال سیم ها
 Wiring diagram

