

VIE Series Axial Flow Fan, With Plastic Propeller

Frame material: Steel with electrostatic paint coating

Impeller material: Polyamide & ABS

Direction of rotation: Counterclockwise, seen on impeller

Fan ingress protection: IP54

Insulation class: B

Mode of operation: Continuous operation

Fan application: Supply and extract ventilation installed in various premises like industrial, commercial premises, greenhouses, poultry houses, mining farms, parking and warehouse.



هواکش صنعتی ایلکا با پروانه پلاستیکی

VIE Series Axial Flow Fan

هواکش صنعتی ایلکا

با پروانه پلاستیکی سری VIE

جنس بدنه فن : فولاد با پوشش رنگ الکترو استاتیک

جنس پروانه فن: پلی آمید و ABS

جهت چرخش : پاد ساعتگرد از سمت پروانه



درجه حفاظت فن : IP54

کلاس عایق بندی موتور : B

نوع عملکرد موتور : دائم کار

کاربرد فن : تهویه فضاهای مختلف مانند صنعتی، تجاری،

گلخانه ها، مرغداری ها، مزارع صنعتی، پارکینگ و انبارها .

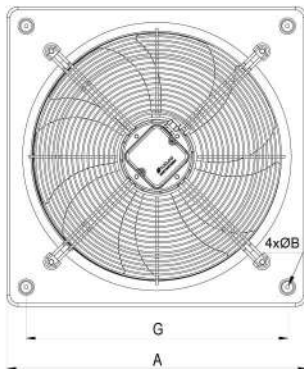

| Model | A | B | D | E | F | G |
|--------|-----|---|-----|-----|-----|-----|
| VIE-30 | 400 | 6 | 300 | 60 | 95 | 345 |
| VIE-35 | 450 | 6 | 352 | 70 | 95 | 365 |
| VIE-40 | 500 | 6 | 405 | 80 | 85 | 425 |
| VIE-50 | 605 | 6 | 505 | 90 | 110 | 517 |
| VIE-60 | 725 | 8 | 600 | 120 | 110 | 615 |
| VIE-71 | 850 | 8 | 700 | 130 | 120 | 735 |

ابعاد برحسب میلیمتر ارائه شده است .



تمامی اعداد ارائه شده مربوط به حالت آزاد (Free Delivery) کارکرد فن هستند.

| NO | Model | Fan Diameter (mm) | Voltage (V) | Current (A) | Power (W) | Speed (rpm) | Air flow (m3/h) | IP | Weight (Kg) | Sound Pressure Level* (dBA) |
|----|-----------|-------------------|-------------|-------------|-----------|-------------|-----------------|----|-------------|-----------------------------|
| 1 | VIE-30A4S | 300 | 220 | 0.55 | 90 | 1430 | 1400 | 54 | 5.5 | 52 |
| 2 | VIE-35A4S | 350 | 220 | 0.6 | 100 | 1375 | 2500 | 54 | 6 | 57 |
| 3 | VIE-40A4S | 400 | 220 | 0.75 | 150 | 1300 | 2900 | 54 | 6.8 | 58 |
| 4 | VIE-50A4S | 500 | 220 | 1.4 | 300 | 1280 | 5600 | 54 | 9 | 70 |
| 5 | VIE-50A4T | 500 | 380 | 0.7 | 300 | 1320 | 5900 | 54 | 9 | 70 |
| 6 | VIE-60R4S | 600 | 220 | 3.6 | 750 | 1350 | 11000 | 54 | 20.5 | 74 |
| 7 | VIE-60R4T | 600 | 380 | 1.8 | 750 | 1400 | 11300 | 54 | 20.5 | 74 |
| 8 | VIE-71R4T | 710 | 380 | 2.6 | 1450 | 1350 | 17000 | 54 | 30 | 82 |

* صدای محصول در فاصله معادل سه برابر قطر محصول (حداقل ۱/۵ متر) اندازه گیری شده است.

